

ATS-S

The ATS is an accessory of the HPS15KTL to HPS50KTL. When both the grid and DG need to access the HPS, the ATS will be used to switch between the grid and DG automatically.

Features



Compatible for HPS15KTL to HPS50KTL



Flexible management




Transfer automatically between grid and DG



Support remote control of DG



Block Diagram

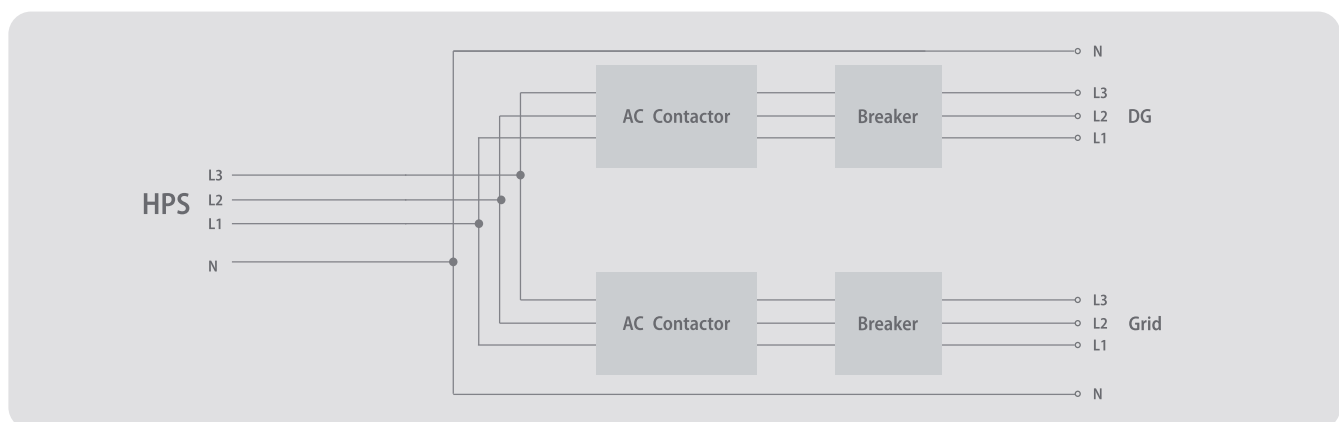

ATS-S		
Rated voltage		400V
Rated current		72A
Rated frequency		50/60Hz
Rated power		50KVA
Grid breaker		125A
DG breaker		125A
Lightning protection		Type II
Protection degree		IP65
Relative humidity		0~95% non-condensing
Operating temperature		-25°C~+55°C
Dimension (W/H/D)		411/260/165mm
Weight		9kg
Communication		CAN
