

PV-CB16M-P


The PV combiner box is an accessory for multiple PV strings connections, and it is with a smart controller inbuilt for monitoring, along with comprehensive protections including the fuse and SPD.

Features

-  Lightning protection
-  IP65 environment compatibility
-  RS485 communication interface
-  Monitoring function
-  Flexible design with 16 input
-  Input fuse for over current protection



Block Diagram

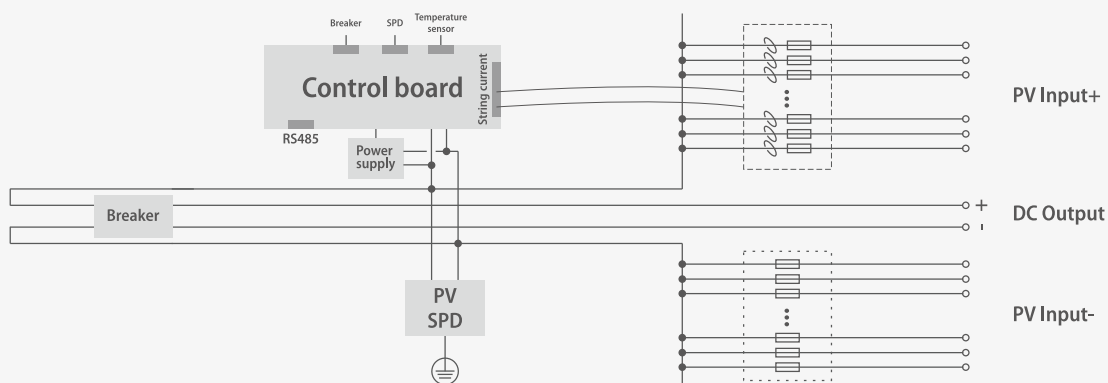

PV-CB16M-P**Input DC**

Max. input voltage	1000V
Max. string Isc	20A
Number of input string	16
Input fuse	1 on negative and positive pole of each string, 30A, 10*38mm
Input cable gland	4mm-8mm cable diameter
Input cable terminal	4mm ² -6mm ²

Output DC

Number of output	1
Max. output current	320A
Output breaker	400A
Output cable terminal	120mm ²
Output cable gland	18mm-25mm cable diameter

General Information

Dimension (W/H/D)	600/500/202mm
Weight	29kg
Enclosure material	Galvanized steel
Protection degree	IP65
Operating temperature	-25°C~55°C
Humidity	0~99%
Altitude	2000m without derating
Lightning protection	Type II
Cooling method	Natural convection
Mounting	Wall-mount
Monitoring	String current, bus voltage, breaker status, surge arrester status, internal temperature
Power supply	DC300V~1000V
Power consumption	14W
Communication	RS485
