

ATESS Batt-Master Cabinet 10R-280R







The pictures is for reference only, please refer to the actual product.

LEADING - EDGE TECHNOLOGY


Overview

The DC cabinet is mainly to aggregate and share the current distribution of each battery cabinet to achieve the charge and discharge management function of each battery cabinet. The DC cabinet consists of fuse, copper bars, MBMS and LCD.

Features

-  **Safety first**
-  **Touchscreen LCD**
-  **Inbuilt MBMS**
-  **Multiple battery racks combination**

Block Diagram

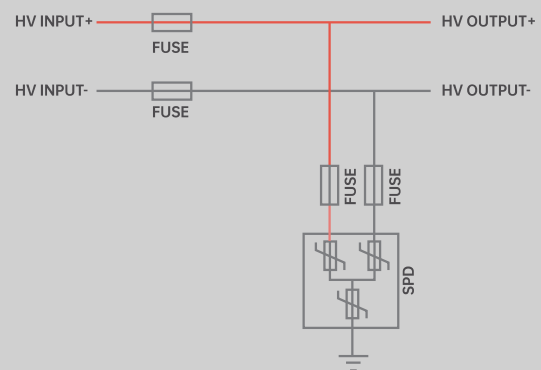

Shenzhen AteSS Power Technology Co.,Ltd

GROWATT-ATESS Industrial Park, No.23 Zhulongtian Road, Shuitian Community, Shiyan Street, Baoan District, Shenzhen

Datasheet

ATESS Batt-Master Cabinet 10R-280R

Range of battery racks connected in parallel	10
Rated battery rack current	140A
Max. battery rack current	168A
Rated charge and discharge current	1400A
Max. charge and discharge current	1680A
Max. battery voltage	1500V
MBMS	Inbuilt
Protection degree	IP54
Dimensions (W/H/D)	1300/2316/700mm
Weight	649kg
Display	7 inch touch screen